






● 黑/Black | ○ 白/White | ● 银/Silver

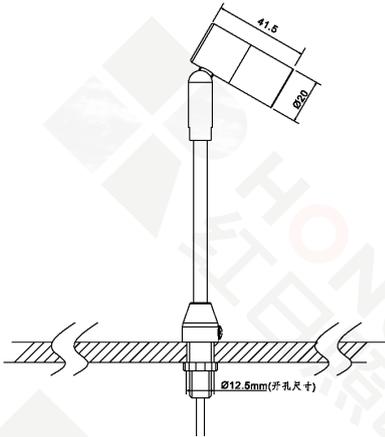


3000K	4000K	H(m)	E(lx)	D(m)
15°		1	2440	0.280
		2	610	0.560
		3	271	0.840
		4	98	1.120

Beam Angle	15°
Light Source Luminous Flux	285 lm
Lighting Luminous Flux	57 lm/W
Luminaire Efficiency	99.95%



3000K	4000K	H(m)	E(lx)	D(m)
25°		1	1264	0.460
		2	316	0.920
		3	140	1.400
		4	86	1.920

Beam Angle	25°
Light Source Luminous Flux	283 lm
Lighting Luminous Flux	26.6 lm/W
Luminaire Efficiency	100%



3000K	4000K	H(m)	E(lx)	D(m)
40°		1	1802	0.810
		2	451	1.700
		3	200	2.600
		4	57	3.500

Beam Angle	40°
Light Source Luminous Flux	290 lm
Lighting Luminous Flux	52 lm/W
Luminaire Efficiency	100%

功能特点：

创新设计，柜内或柜外灵活调整射灯的光束角和投射角，调节角度充足、灵活，小巧精致，功能齐全；独家开发的照明技术，光效均匀无杂光，保证 LED 的高刷新频率满足摄像要求，高效的照明，减少能源消耗，提高耐用度，延长使用寿命；实现展品的色彩还原和真实感表达。

产品名称	柜内立杆定焦灯	控制方式
型号	H2031	
输入	DC 12V 外置恒流源	
光源功率	2.1W	
额定功率	3W	
防护等级	IP20	
显色指数	≥95	
色温	3000K/3500K/4000K	
角度	15°/25°/40°	
外形尺寸	Φ20×H250mm (高度可定制)	
开孔尺寸	Φ12.5mm	
灯体材料	铝合金	